


TEREX DEMAG AC 35

DIMENSÕES

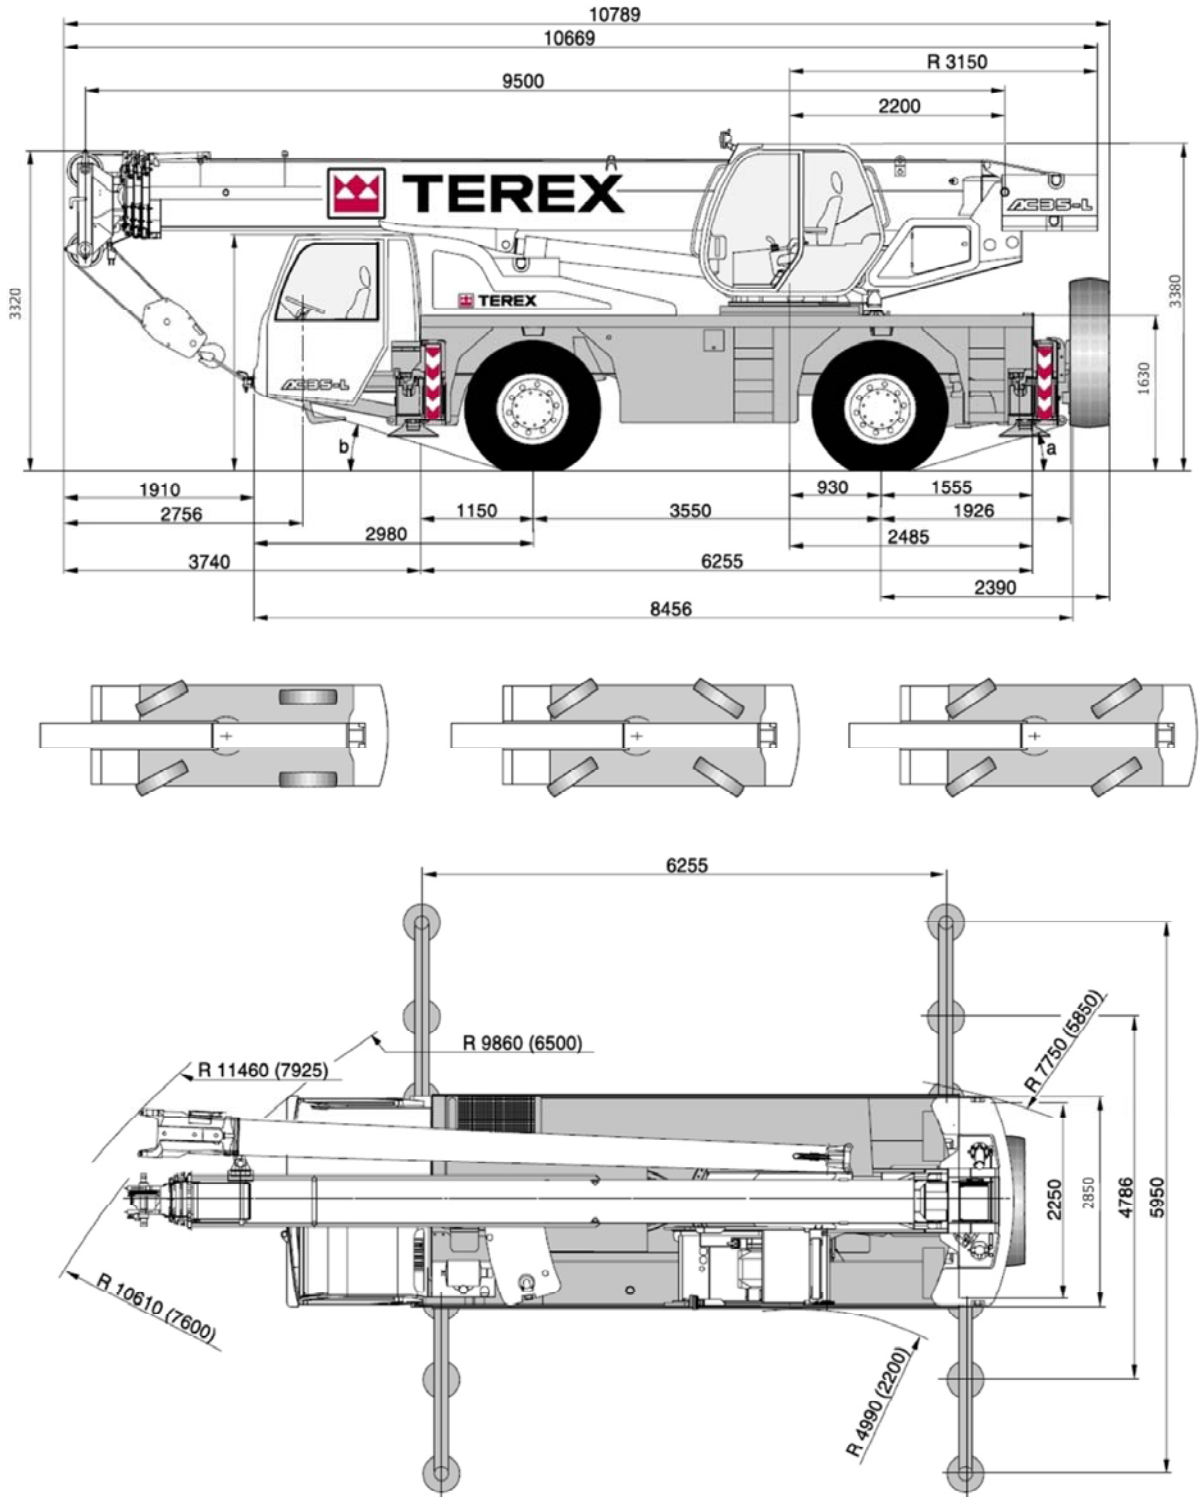

CAPACIDADES DE CARGA – LANÇA BASE


TEREX DEMAG AC 35

 5,5 ton  6,200 m x 5,950 m 360° DIN/ISO

Lança principal									
Raio	m	9,40	14,40	19,50	24,70	28,90	30,40	m	Raio
m		ton	ton	ton	ton	ton	ton		m
3		35,0 (*)	-	-	-	-	-		3
3		32,00	20,00	-	-	-	-		3
3,5		27,45	20,35	18,00	-	-	-		3,5
4		24,90	20,75	18,45	14,00	-	-		4
4,5		22,60	21,20	18,70	14,50	-	-		4,5
5		20,60	20,60	17,80	14,30	-	-		5
6		17,00	17,20	15,60	12,65	10,00	9,00		6
7		11,50	14,45	13,45	11,35	9,80	8,85		7
8		-	11,50	11,25	10,20	8,85	8,50		8
9		-	9,50	9,50	9,05	8,10	7,85		9
10		-	8,00	8,10	7,90	7,40	7,30		10
11		-	6,70	6,90	6,95	6,65	6,55		11
12		-	5,95	6,00	6,00	5,95	5,85		12
13		-	-	5,20	5,20	5,20	5,20		13
14		-	-	4,65	4,65	4,70	4,70		14
15		-	-	4,10	4,15	4,15	4,15		15
16		-	-	3,65	3,70	3,70	3,70		16
17		-	-	3,30	3,30	3,30	3,30		17
18		-	-	-	3,00	3,00	3,00		18
19		-	-	-	2,70	2,70	2,70		19
20		-	-	-	2,40	2,45	2,45		20
21		-	-	-	2,20	2,20	2,20		21
22		-	-	-	2,00	2,00	2,00		22
23		-	-	-	-	1,80	1,80		23
24		-	-	-	-	1,65	1,65		24
25		-	-	-	-	1,50	1,50		25
26		-	-	-	-	1,35	1,35		26
27		-	-	-	-	-	1,20		27
28		-	-	-	-	-	1,10		28

(*) – Capacidade à retaguarda (lança 0°)

DIAGRAMA DE CARGA – LANÇA BASE

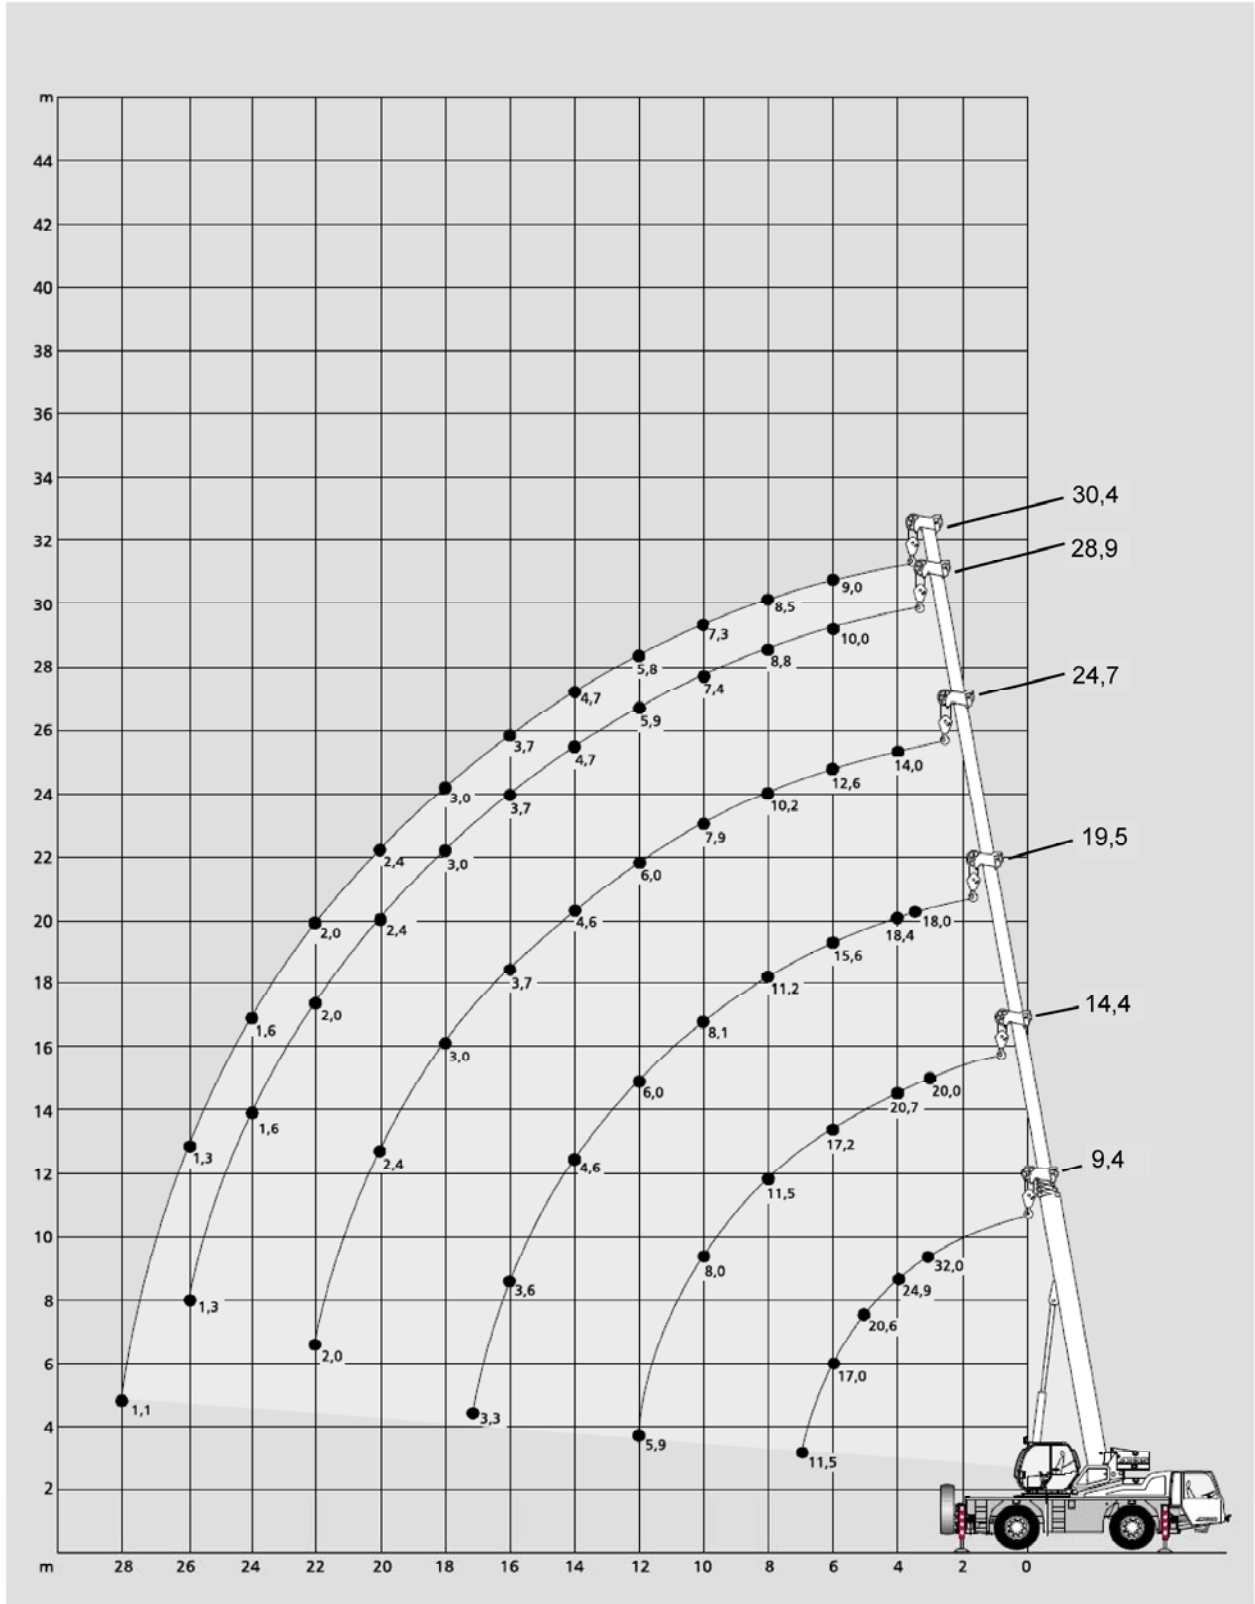



CAPACIDADES DE CARGA – LANÇA BASE + JIB

	5,5 ton		6,20 m x 5,95 m	360°	DIN/ISO
--	---------	--	-----------------	------	---------

		Lança principal																		
		24,7 m						28,9 m						30,4 m						
		Comprimento JIB																		
		8,0			15,0			8,0			15,0			8,0			15,0			m
Raio	m	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	Raio
	m	ton	ton	ton	ton	ton	ton	ton	ton	ton	ton	ton	ton	ton	ton	ton	ton	ton	ton	m
6	6,50	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6
7	6,40	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7
8	6,30	-	-	3,20	-	-	5,35	-	-	-	-	-	-	-	-	-	-	-	-	8
9	6,05	4,25	-	3,05	-	-	5,35	-	-	-	-	-	-	5,30	-	-	-	-	-	9
10	5,60	4,10	-	2,95	-	-	5,05	-	-	2,85	-	-	-	4,90	-	-	-	-	-	10
11	5,30	3,95	3,15	2,80	-	-	4,80	3,95	-	2,75	-	-	-	4,60	3,90	-	2,80	-	-	11
12	5,00	3,80	3,10	2,70	-	-	4,50	3,80	-	2,65	-	-	-	4,35	3,70	-	2,65	-	-	12
13	4,75	3,65	3,00	2,55	-	-	4,25	3,70	2,95	2,55	-	-	-	4,05	3,55	3,10	2,55	-	-	13
14	4,45	3,55	2,95	2,50	1,90	-	4,00	3,60	2,95	2,50	-	-	-	3,80	3,35	3,00	2,45	-	-	14
15	4,20	3,45	2,90	2,40	1,85	-	3,80	3,45	2,90	2,40	1,80	-	-	3,60	3,15	2,90	2,40	-	-	15
16	3,95	3,40	2,85	2,30	1,75	-	3,55	3,30	2,85	2,30	1,75	-	-	3,35	3,05	2,80	2,30	1,80	-	16
17	3,55	3,30	2,85	2,20	1,70	1,50	3,40	3,20	2,80	2,25	1,75	-	-	3,15	2,90	2,70	2,25	1,75	-	17
18	3,20	3,20	2,80	2,10	1,70	1,40	3,15	3,05	2,80	2,15	1,70	-	-	3,00	2,80	2,60	2,15	1,70	-	18
19	2,90	3,10	2,75	2,02	1,65	1,40	2,85	2,95	2,75	2,10	1,65	1,40	-	2,80	2,65	2,50	2,10	1,65	-	19
20	2,65	2,80	2,75	1,95	1,60	1,35	2,60	2,75	2,75	2,05	1,60	1,35	-	2,55	2,55	2,40	2,05	1,60	1,40	20
22	2,20	2,30	2,40	1,85	1,55	1,35	2,10	2,25	2,40	1,90	1,55	1,35	-	2,10	2,25	2,25	1,95	1,55	1,35	22
24	1,80	1,90	1,95	1,75	1,45	1,30	1,75	1,90	1,95	1,80	1,50	1,30	-	1,70	1,85	1,95	1,80	1,50	1,30	24
26	1,50	1,60	1,60	1,65	1,40	1,36	1,45	1,55	1,60	1,60	1,45	1,30	-	1,40	1,50	1,60	1,55	1,45	1,30	26
28	1,25	1,30	1,30	1,45	1,35	1,25	1,20	1,25	1,30	1,35	1,40	1,25	-	1,15	1,25	1,30	1,30	1,40	1,25	28
30	1,05	1,05	-	1,20	1,35	1,15	0,95	1,05	1,05	1,10	1,30	1,25	-	0,95	1,00	1,05	1,05	1,25	1,25	30
32	-	-	-	1,00	1,10	-	0,80	0,80	0,80	0,95	1,05	1,15	-	0,75	0,80	-	0,90	1,00	1,15	32
34	-	-	-	0,85	0,90	-	0,60	0,60	-	0,75	0,90	0,95	-	0,55	0,60	-	0,70	0,85	0,90	34
36	-	-	-	0,70	0,75	-	-	-	-	0,60	0,70	-	-	-	-	-	0,55	0,65	0,70	36
38	-	-	-	-	-	-	-	-	-	-	0,55	-	-	-	-	-	-	0,50	-	38

DIAGRAMA DE CARGA – LANÇA BASE + JIB

TEREX DEMAG AC 35

