

P210AJTK TRACKED

**NEW GENERATION
OF TRACKED PLATFORM
DESIGNED FOR OVERHEAD
WORK AND TO PROVIDE
LOGISTICAL SUPPORT
FOR THE WORKSITE**

LIFETIME EXCELLENCE



TECHNICAL SPECIFICATIONS P210AJTK


Maximum working height	20.3 m
Maximum cage floor	18.3 m
Maximum lateral outreach	10.2 m*
Basket capacity	220 kg
Angle of main boom	0° + 80°
Turntable rotation	360°
Basket dimensions	1.4 x 0.7 x 1.1 m removable
Engine featured as standard	14 HP, petrol
Height in transport conditions	2.00 m
Width in transport conditions	1.4 m (0.78 m without basket)
Length in transport conditions	4.63 m (4.05 m without basket)
GVW	2900 kg

* With basket rotation (opt)


OPTIONAL

One-man basket
Electric pump for internal use
Towbar for trailer
Diesel engine
Non-marking track belts
Radio control for travel/stabilisation
Type-approved trailer
Basket rotation
Dual-speed travel system

WORKING DIAGRAMS

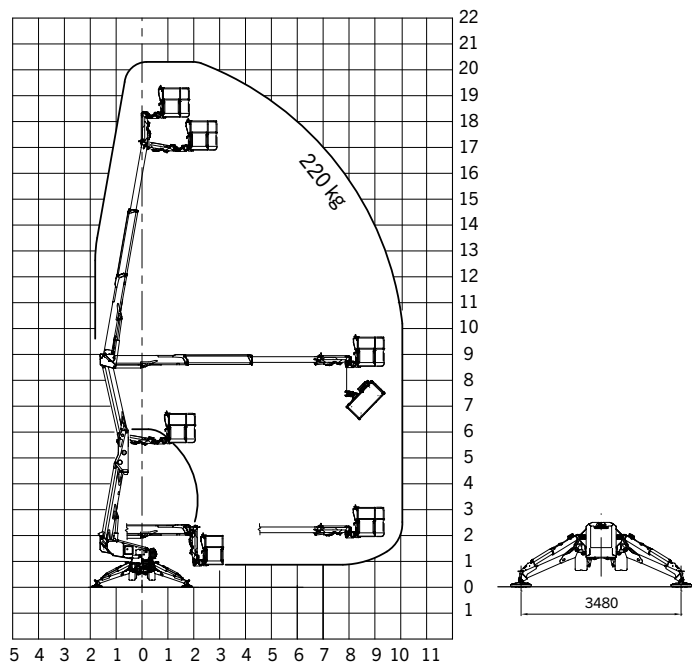

DIMENSIONS

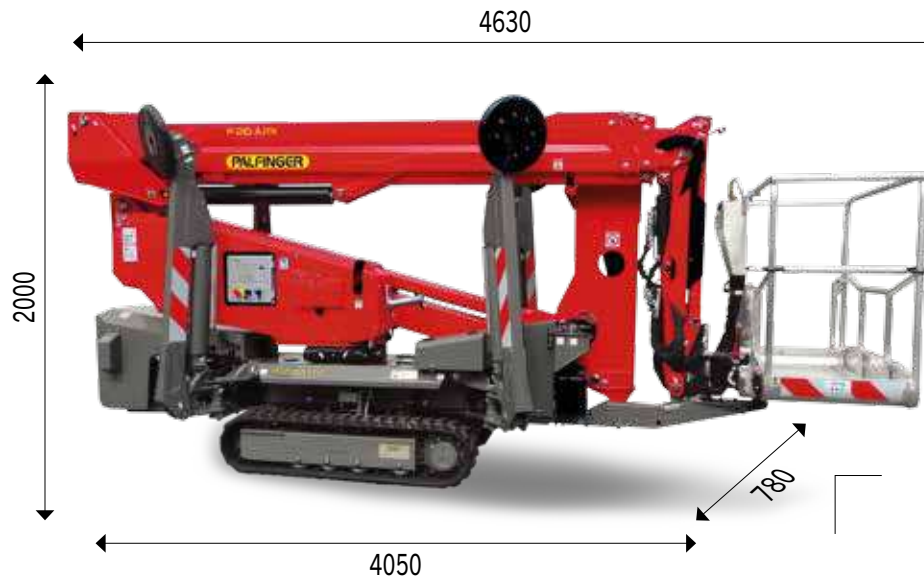

SALES DEALER